















FLY/B/AT

LifePO4

LITHIUM IRON PHOSPHATE BATTERY



Advantages of the FLYBAT lithium iron phosphate (LiFePO4) batteries:

- 5 year manufacturer's warranty
- The safest technology, without the risk of fire or explosion
- Integrated BMS
- Long service life
- Steadily improving storage capacity
- 99 % efficient
- High stability even under extreme loads
- No memory effect no need for full charge and discharge cycles
- High performance even under extreme conditions
- Deep and steady discharge and charging efficiency
- Small size and light weight

ELECTRICAL SPECIFICATIONS			
Nominal Voltage	12.8 V	Resistance	30 mΩ
Nominal Capacity	100 Ah	Efficiency	99%
Capacity @ 25A	240 min	Self Discharge	<3% per Month
Energy	1280 Wh	Maximum Modules in Series/parallel	4/4

MECHANICAL SPECIFICATIONS				
Dimensions	Length	318 mm		
	Width	175 mm		
	Height	188 mm		
Weight		13.5 kg		
Terminal Type		T1		
Terminal Torque		9 - 11 N-m		
Case Material		ABS		
Enclosure Protection		IP56		
Chemistry		LiFePO ₄		

	4
TEMPERATURE SPECIFICATIONS	
Discharge Temperature	-20 to 60 °C
Charge Temperature	0 to 55 °C
Storage Temperature	-20 to 60 °C
PCM High Temperature Cut-Off	2° 08

CHARGE SPECIFICATIONS	
Recommended Charge Current	50 A
Maximum Charge Current	100 A
Recommended Charge Voltage	14.2 V - 14.6 V
PCM Charge Voltage Cut-Off	15.6 V
Reconnect Voltage	15.2 V
Balancing Voltage	14.4 V

DISCHARGE SPECIFICATIONS	
Maximum Continuous Discharge Current	100 A
Peak Discharge Current	200 A
PCM Discharge Current Cut-Off	280 A (±50 A)
Recommended Low Voltage Disconnect	11 V
PCM Discharge Voltage Cut-Off	8 V
Reconnect Voltage	9.2 V
Short Circuit Protection	Yes




















FLY/B/AT


LifePO4


LITHIUM IRON PHOSPHATE BATTERY

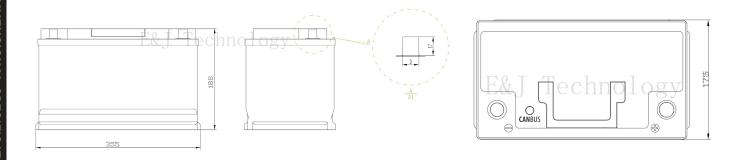

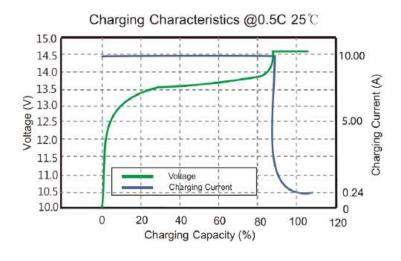

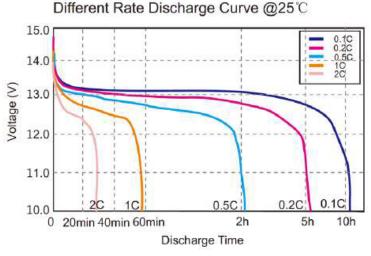

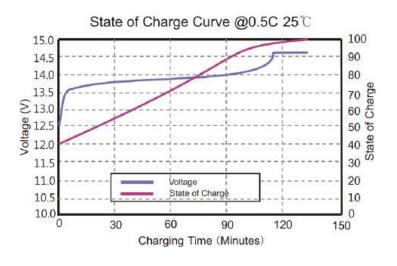

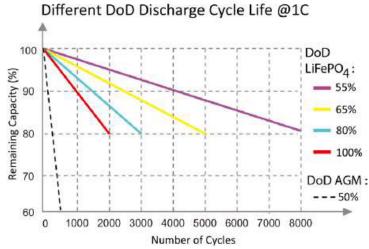

BVD GmbH Am Leitzelbach 29 74889 Sinsheim

Telefon: 07261-94832-10 E-Mail: bvd@bvd24.de

