



#### Advantages of the FLYBAT lithium iron phosphate (LiFePO4) batteries:

- 5 year manufacturer's warranty
- The safest technology, without the risk of fire or explosion
- Integrated BMS
- Long service life
- Steadily improving storage capacity
- 99 % efficient
- High stability even under extreme loads
- No memory effect no need for full charge and discharge cycles
- High performance even under extreme conditions
- Deep and steady discharge and charging efficiency
- Small size and light weight

#### **ELECTRICAL** SPECIFICATIONS

| Nominal Voltage  | 12.8 V  | Resistance                         | 30 mΩ         |
|------------------|---------|------------------------------------|---------------|
| Nominal Capacity | 75 Ah   | Efficiency                         | 99%           |
| Capacity @ 25A   | 180 min | Self Discharge                     | <3% per Month |
| Energy           | 960 Wh  | Maximum Modules in Series/parallel | 4/4           |

## **MECHANICAL** SPECIFICATIONS

|                      | Length | 279 mm              |
|----------------------|--------|---------------------|
| Dimensions           | Width  | 175 mm              |
|                      | Height | 189 mm              |
| Weight               |        | 10.8 kg             |
| Terminal Type        |        | T1                  |
| Terminal Torque      |        | 9 - 11 N-m          |
| Case Material        |        | ABS                 |
| Enclosure Protection |        | IP66                |
| Chemistry            |        | LiFeP0 <sub>4</sub> |

| TEMPERATURE SPECIFICATIONS   |              |  |  |  |
|------------------------------|--------------|--|--|--|
| Discharge Temperature        | -20 to 60 °C |  |  |  |
| Charge Temperature           | 0 to 55 °C   |  |  |  |
| Storage Temperature          | -20 to 60 °C |  |  |  |
| PCM High Temperature Cut-Off | 3° 08        |  |  |  |


### **CHARGE** SPECIFICATIONS


| Recommended Charge Current | 50 A            |
|----------------------------|-----------------|
| Maximum Charge Current     | 80 A            |
| Recommended Charge Voltage | 14.2 V - 14.6 V |
| PCM Charge Voltage Cut-Off | 15.6 V          |
| Reconnect Voltage          | 15.2 V          |
| Balancing Voltage          | 14.4 V          |


# **DISCHARGE** SPECIFICATIONS


| Maximum Continuous Discharge Current | 100 A         |
|--------------------------------------|---------------|
| Peak Discharge Current               | 200 A         |
| PCM Discharge Current Cut-Off        | 280 A (±50 A) |
| Recommended Low Voltage Disconnect   | 11 V          |
| PCM Discharge Voltage Cut-Off        | 8 V           |
| Reconnect Voltage                    | 9.2 V         |
| Short Circuit Protection             | Yes           |



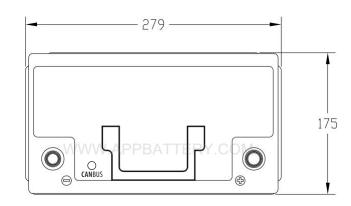

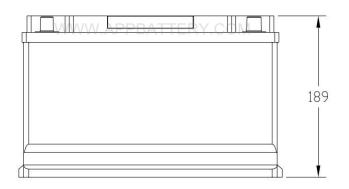

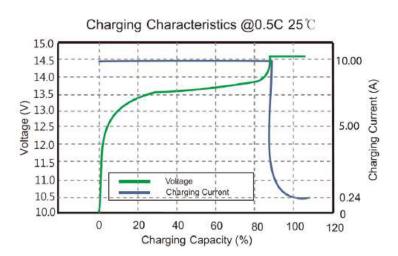


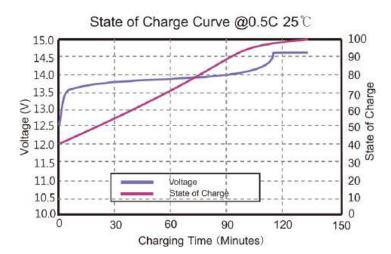



**BVD GmbH** 

Am Leitzelbach 29 74889 Sinsheim

Different Rate Discharge Curve @25°C

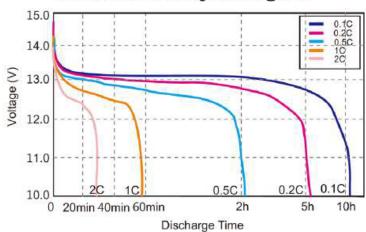



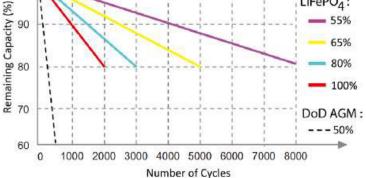

BVD Batterie Vertrieb Deutschland

please visit www.bvd24.de

Telefon: 07261-94832-10

E-Mail: bvd@bvd24.de